



16-Port Gigabit GREENnet Switch TEG-S16g(V1.0R)

The 16-Port Gigabit GREENnet Switch, model TEG-S16g, provides high bandwidth performance, ease of use, and reliability, all while reducing power consumption by up to 70%*.

GREENnet technology automatically adjusts power voltage as needed, resulting in substantial energy savings. Embedded GREENnet technology works right out of the box with no management requirement.

Boost office network efficiency and eliminate network congestion with Gigabit speeds and a total switching capacity of 32Gbps with Full-Duplex mode. A built in universal power supply reduces cable clutter and diagnostic LEDs help with network troubleshooting. Plug and Play this sturdy metal switch for reliable high-speed network connectivity.

FEATURES

- 16 x 10/100/1000Mbps Auto-MDIX Gigabit Ethernet ports
- On / off power switch
- Features a 32Gbps forwarding capacity
- Internal power supply reduces clutter
- GREENnet technology reduces power consumption when:
 - a. Ethernet port is not in use
 - b. Connected device is turned off
 - c. Connected device is in power-saving mode
 - d. Based on Ethernet cable length
- IEEE 802.3x Flow Control for full-duplex mode
- Back pressure Flow Control for half-duplex mode
- Store-and-Forward switching architecture with non-blocking wire-speed performance
- Integrated address look-up engine with an 8K MAC address table
- 2Mbits RAM data buffer
- Operates and maximizes packet filtering and forwarding rate
- Jumbo Frame support up to 9216Bytes
- Rackmount hardware included
- Sturdy metal housing
- Diagnostic LEDs and Plug & Play support
- 3-year limited warranty

*Max power savings compared with standard TRENDnet switches.

16-Port Gigabit GREENnet Switch


TEG-S16g(V1.0R)

SPECIFICATIONS

HARDWARE

Standards	<ul style="list-style-type: none">• IEEE 802.3 10Base-T; IEEE 802.3u 100Base-TX• IEEE 802.3ab 1000Base-T; IEEE 802.3x Flow Control;
Network Media	<ul style="list-style-type: none">• Ethernet: Cat. 5 up to 100 m• Fast Ethernet: Cat. 5 and 5e up to 100 m• Gigabit Ethernet: Cat. 5e and 6 up to 100 m
Data Rate	<ul style="list-style-type: none">• Ethernet: 10Mbps/20Mbps (half/full-duplex)• Fast Ethernet: 100Mbps/200Mbps (half/full-duplex)• Gigabit Ethernet: 2000Mbps (full-duplex)
Protocol / Topology	<ul style="list-style-type: none">• CSMA /CD, Star
Power Consumption	<ul style="list-style-type: none">• 7.2 Watts (max.)
Switch Fabric	<ul style="list-style-type: none">• 32Gbps
Interface	<ul style="list-style-type: none">• 16 x 10/100/1000Mbps Auto-MDIX RJ-45 ports
Power Button	<ul style="list-style-type: none">• On / off power button
Data RAM Buffer	<ul style="list-style-type: none">• 2Mbits
Filtering Table	<ul style="list-style-type: none">• 8K entries
Jumbo Frame Support	<ul style="list-style-type: none">• Up to 9216Bytes
Diagnostic LED	<ul style="list-style-type: none">• Power, Link/ACT, 100Mbps, 1000Mbps
Power	<ul style="list-style-type: none">• 100~240VAC, 50/60Hz Internal universal switching power
Dimension	<ul style="list-style-type: none">• 440 x 140 x 45 mm (17.4 x 5.5 x 1.8 in.)
Weight	<ul style="list-style-type: none">• 1.6 kg (3.5 lbs.)
Temperature	<ul style="list-style-type: none">• Operating: 0° ~ 40° C (32° ~ 104° F) Storage: -10° ~ 70° C (14° ~ 158° F)
Humidity	<ul style="list-style-type: none">• Max. 90% (non-condensing)
Certifications	<ul style="list-style-type: none">• CE, FCC

NETWORKING SOLUTIONS

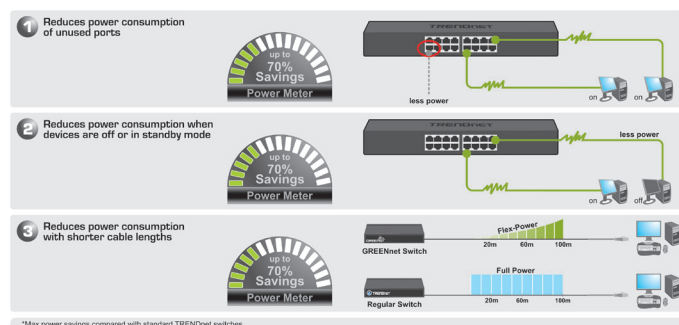

PACKAGE CONTENTS

TEG-S16G

Multi-Language Quick Installation Guide

Power cord (1.8m / 6ft.)

Rackmount hardware

RELATED PRODUCTS

TEW-639GR 300Mbps Wireless N Gigabit Router

TEW-S24g 24-Port Gigabit GREENnet Switch

TEG-PCITXR Gigabit PCI Adapter

CONTACT INFORMATION

TRENDnet

20675 Manhattan Place, Torrance, CA 90501 USA

Tel: 1-310-961-5500

Fax: 1-310-961-5511

Web: www.trendnet.com

Email: sales@trendnet.com

1-888-326-6061

