USB-C Multiport Dock with Power Pass-through
UH3237

● The ultra-sleek ATEN USB-C Multiport Dock is a one-step total upgrade for your laptop that provides all the extra expansion capabilities that you need. Simply use one cable to add up to 13 devices, with power delivery pass-through to boost your productivity with extra HDMI, VGA, USB 3.2 Gen 1, USB 2.0, SD/MicroSD, Ethernet and Audio connections.

Enjoy stunning 4K video or a dual HD monitor setup with HDMI, and VGA functionality. The UH3237 routes video from a source computer to a HDMI monitor via a single cable while maintaining the highest quality 4K resolution. You can also mirror or extend your Windows USB-C laptop to two monitors at 1920 x 1080@60hz.

The UH3237 also supports USB-C Power Delivery Pass-Through up to 85W, which means it can provide power to your device via a USB-C PD power adapter with the PD profile specifications of 5V, 9V, 12V, 15V, 20V.

The integrated USB 3.2 Gen 1 Type-A port supports data transfer rate up to 5Gbps, giving seamless access to USB flash drive. The USB 2.0 Type-A port are designed for keyboard and mouse to minimize the signal interference. The equipped Type-C data port can be used for the latest USB-C devices.

This ergonomic, plug-and-play device (no software drivers are needed) is compatible with all major operating systems (Windows, OS X and iPad Pro).Save space on your desktop by placing your laptop directly on top of the lightweight yet rugged dock or display the dock next to your monitors for a stylish, minimalist workstation.
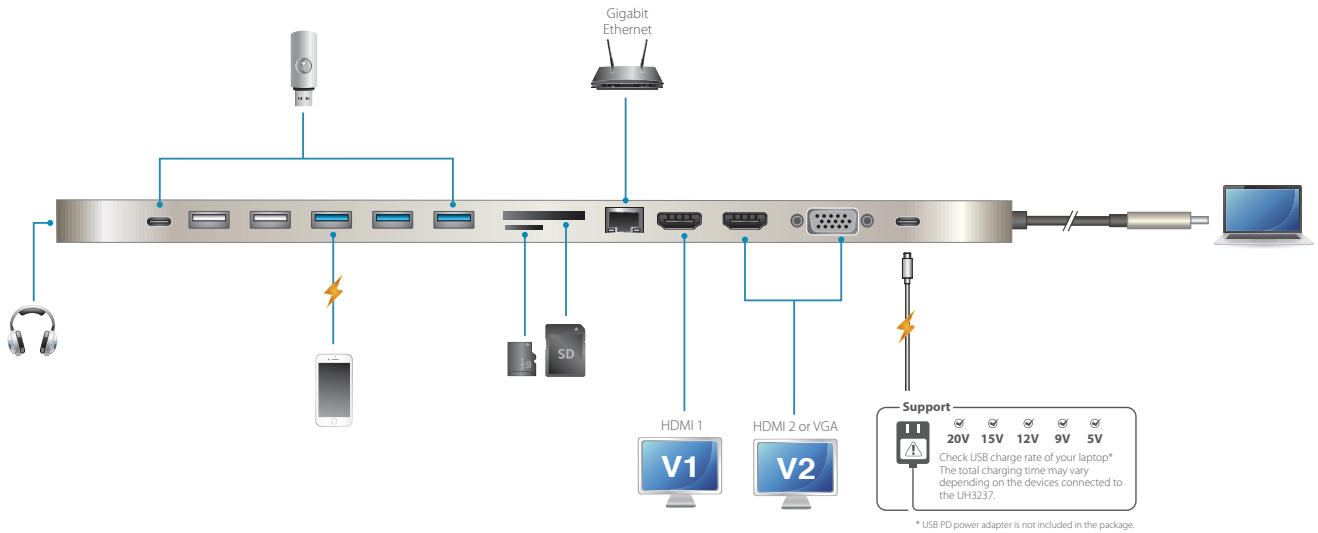
4K | HDMI™ HIGH DEFINITION MULTIMEDIA INTERFACE | OS Support Win, Mac, iPad Pro | USB 3.2 Gen 1 | Dual View 1080P | Power Pass-Thru | PD 3.0 | Fit 15" laptop

Front View

Rear View

Gigabit Ethernet

HDMI 1

HDMI 2 or VGA

V1

V2

Support

20V 15V 12V 9V 5V

Check USB charge rate of your laptop*
The total charging time may vary
depending on the devices connected to
the UH3237.

* USB PD power adapter is not included in the package.

Features

- Expands up to 13 devices instantly through a USB-C cable
- Supports USB power delivery 3.0 (PD3.0) for laptop charging up to 85W via USB-C PD power adapter – power profiles include 5V, 9V, 12V, 15V, 20V
- Supports single display output resolution up to 4K@30 (3840x2160@30Hz) on a single HDMI or dual display output at 1080p (1920x1080@60Hz)
- 1 x USB 3.2 Gen 1 Type-A port supports Battery Charging Specification Revision 1.2 (BC 1.2) for fast-charging device
- 1 x USB 3.2 Gen 1 Type-C data port for latest USB-C device
- Stylish and ultra slim design allows user to place a 15" laptop directly on the top of the docking station and save more desk space*
- Enhanced EMI protection by increasing the cable braid density and adding conductive foam
- Built-in memory card readers (SD/MMC/Micro SD)
- Works with all major operating systems: Windows®, OS X®, and iPad Pro
- Compatible with Thunderbolt 3 (USB-C)
- 3.5mm Stereo 4-Pole Audio Jack with Microphone
- Gigabit Ethernet

*Fits 13"~15" laptop with a USB-C port on the left side.

Specifications

Function	UH3237
Computer Connections	1
Connectors	
Computer	1 x USB-C Male (Black)
Device	2 x USB 2.0 Type-A Female (Black)* 3 x USB 3.2 Gen 1 Type-A Female (Blue)* 1 x USB 3.2 Gen 1 Type-C Female (Data only)* *The total output of 6 USB Ports is max. 5V, 10W.
Video Output	2 x HDMI Female 1 x VGA Female
LAN Ports	1 x Gigabit Ethernet Female (Black)
Audio	1 x 3.5mm stereo 4-pole microphone and headphone jack
Power	1 x USB-C DC-in Female* * Supports USB Power Delivery 3.0 for charging up to 85W, power profiles includes 5V, 9V, 12V, 15V and 20V (additional USB-C PD power adapter needed). * The minimum system power requirement for basic USB functions and video output should be at least 5V, 15W. * For device charging, a Limited Power Source (LPS) certified USB-C PD power adapter over 65 Watt is recommended. * The first 15W will supply to the UH3237, and the balance power will supply to the laptop.
Performance	
Flash Memory	1 x SD Card Slot (SD/SDHC/SDXC) 1 x Micro SD Card Slot (Micro SD/SDHC/SDXC up to 128G)
Video Resolution	**Single View:** HDMI - 3840x 2160@30hz VGA -1920 x 1080@60hz **Dual View**: HDMI 1 / HDMI 2 – 1920 x 1080@60hz HDMI 1 / VGA – 1920 x 1080@60hz * For Dual-View to work, a computer's graphics card must support MST technology. Mac computers and iPad Pro only support a single-view output.
Power Consumption	DC5V, 15W
System Requirements	Windows 10 and above, USB-C enabled computer with DP Alt Mode* * With Intel 7th-Generation Core Processor (Kaby-Lake) and above. For more information on the CPU generation, please go to https://www.intel.com/content/www/us/en/processors/processor-numbers.html. Mac OS X 10.12 and above, USB-C enabled computer iOS 12.1 and above, iPad Pro 3rd generation (2018)*** *** For better HID experience, iPadOS 13 and above is recommended.
Environmental	
Operating Temperature	0 – 40°C
Storage Temperature	-20 – 60°C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Top Cover – Aluminum Bottom Panel - Plastic
Weight	0.37 kg
Dimensions (L x W x H)	35.03 x 7.50 x 1.48 cm

Product information is subject to change without prior notice.