

U S E R M A N U A L

HDMI V2.0 SWITCH 3x1


Plastic Casing Version

Enjoy the vivid world!

INTRODUCTION

3-Port HDMI Switch

The 3- Port HDMI switch allows 3 HDMI ports to be switched to a single display terminal via remote control or buttons on unit. This HDMI Switch supports video formats including 720p, 1080i , 1080p, 4K/30HZ, 4K/60HZ.

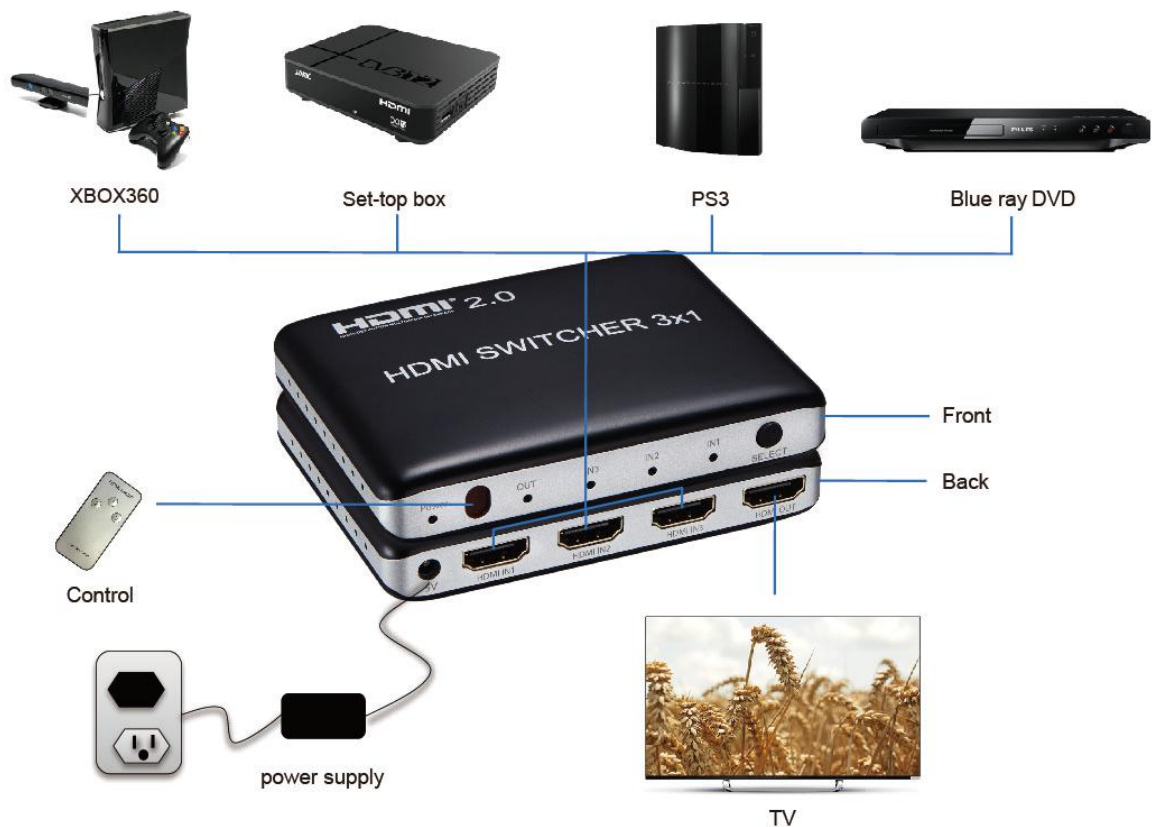

FEATURES

- Support 6Gbps data rate for tmds clock up to 600MHz
- Support HDMI2.0b
- Support 3D
- Supports highest video resolution 4K/60Hz
- Support HDR
- Support 24/30/36 bit deep color

- Support AWG26 HDMI standard cable,Input up to 8metres ,output up to 8metres (4K/30Hz resolution and below)
- Support 2.0 HDMI standard cable, input up to 3 meters, output up to 5 meters (4K/60Hz resolution)
- Supports single high definition display for multiple sources, such as DVD Players, PS4 and HD players, Set Top Boxes
- Needs 5V/1A power adapter.

Product Photos



SPECIFICATIONS

HDMI version	HDMI 2.0b
HDMI resolution	Up to 4K/60Hz
Support video format	3D
Support video color format	24/30/36 bit deep color
Support audio format	DTS-HD/Dolby-trueHD/DTS/Dolby-AC3/DSD
Max bandwidth	600MHz
Max baud rate	6Gbps
Input cable distance	≤8m AWG26 HDMI standard cable under 4K/30Hz; ≤3m 2.0 HDMI standard cable in 4K/60Hz
Output cable distance	≤8m AWG26 HDMI standard cable in 4K/30Hz; ≤5m 2.0 HDMI standard cable in 4K/60Hz
Max working current	350mA
Operating Temperature range	(-10 to +55°C)
Power adapter specification	AC (50HZ, 60HZ) 100V-240V; Output: DC5V/1A
Dimension (L x W x H)	102x79x22 (mm)
Weight	90g

Interface diagram:

Operating and Connecting

1. Connect HD signal sources into HDMI switch input with 3 HDMI cables
2. Connect 1 HDMI display source into HDMI switch output with 1 HDMI cable
3. Connect the switcher with 5V/1A power adapter.

Package Accessories

1. HDMI switcher
2. IR remote control
3. 5V power adapter

4. User manual