

Professional A/V Solutions

## **VanC**ryst

## VM0808 8x8 Video Matrix Switch + Audio

The ATEN VanCryst VM0808 8x8 Video Matrix Switch allows you to connect eight VGA source devices to eight VGA monitors, displays, or projectors at the same time. It's steadfast unique features include: long signal range, easy source/display switching, matrix connections, Power On Detection for source/ display loss prevention.

As a Matrix Switch, each input can be independently connected to any or all outputs, and the audio and video inputs from each source device can also be switched independently, giving you the ultimate in flexibility and control in any multi-display audio/ video installation.








- Connects any of 8 VGA Video + Audio inputs to any of 8 VGA Video + Audio outputs
- Long signal range supports up to 30 meters
- Easily switch between multiple sources and multiple displays
- Local Operation:
  - Front panel LCD display and pushbuttons
  - Tuner Dials with pushbutton
  - RS-232 Serial controller
  - IR Remote Control
- Superior video quality up to 1920 x 1440; VGA, SVGA, SXGA, UXGA, and WUXGA (1920 x 1200)
- Features EDID expert technology to set up different video configurations via different EDID modes
- Supports up to 500 MHz bandwidth
- Supports stereo audio
- Independent switching of audio and video sources each input can be independently connected to any or all outputs for flexibility
- Power On Detection If one of the video sources is powered off the VM0808 automatically switches to the next powered-on source
- Cascade additional VM0808 units up to three levels
- Rack Mountable
- All metal casing

## ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan Phone: 886-2-8692-6789 Fax: 886-2-8692-6767 www.aten.com E-mail: marketing@aten.com

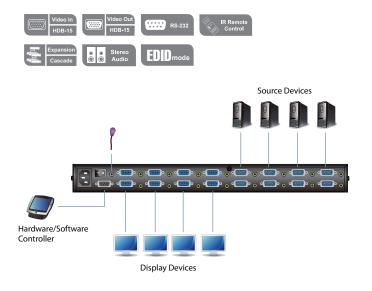

## Specification

Function		VM0808
Connectors	Video In	8 x HDB-15 Male (Blue)
	Video Out	8 x HDB-15 Female (Blue)
	Audio In	8 x Mini Stereo Jack Female (Green)
	Audio Out	8 x Mini Stereo Jack Female (Green)
	RS-232	1 x DB9 Female (Black)
	IR Receiver	1 x Mini Stereo Jack Female (Black)
	Power	1 x 3-prong AC Socket
Switches	In / Out	2 x Tuner Dials
	Esc	1 x Pushbutton
	Menu	1 x Pushbutton
	Profile	1 x Pushbutton
	Enter	1 x Pushbutton
	Power	1 x Rocker
LEDs	Menu	1 (Green)
	Profile	1 (Green)
Video	Bandwidth	500 MHz
	Resolution	1920 x 1440 @ 60Hz
Power Consumption		120V/8W; 230V/8W
Environment	Operating Temp.	0-50°C
	Storage Temp.	-20-60°C
	Humidity	0-80% RH, Non-condensing
Physical Properties	Housing	Metal
	Weight	2.48 kg
	Dimensions (L x W x H)	43.72 x 16.85 x 4.40 cm

